








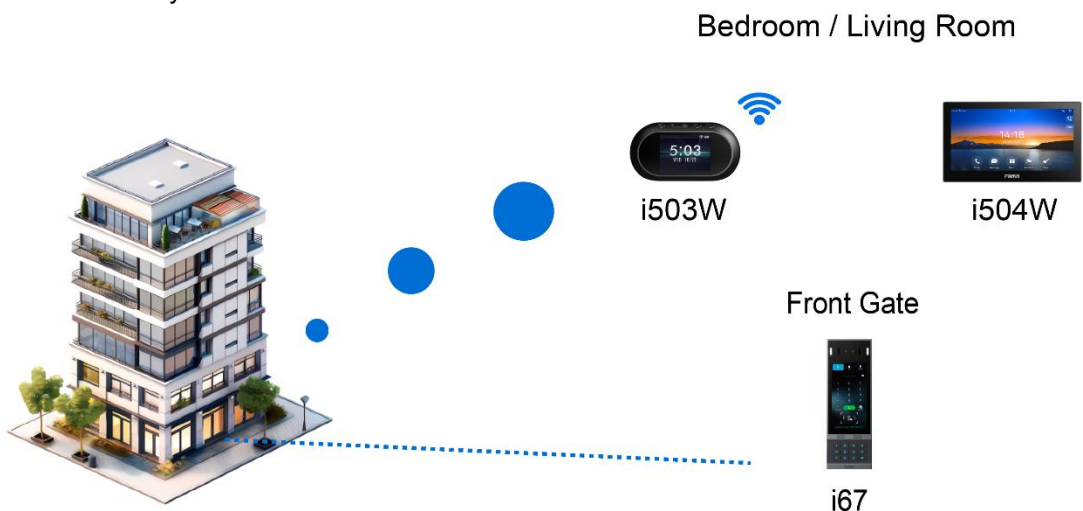
# Fanvil i503W SIP Indoor Station

## Overview

The i503W is a compact, wire-free indoor station tailored for retrofit and hard-to-wire projects. With its built-in rechargeable battery, Type-C interface, and plug-and-play design, it allows installers to deploy it rapidly while minimizing wiring costs. Designed for modern apartments, villas, and legacy buildings, i503W delivers a flexible, reliable, and convenient intercom experience, positioning it as the ideal choice for cost-effective, fast-deployment projects.

## Features

- 
2.8-inch color display, supports audio and video calls with Fanvil door phones
- 
Battery-powered for extended standby time and compact design for flexible indoor use
- 
Supports G.722 and Opus audio codecs with up to 5-meter voice pickup for clear indoor communication
- 
One-touch family call and multi-party full-duplex communication
- 
Supports dual-band 2.4 GHz / 5 GHz Wi-Fi 6 for fast, stable wireless connectivity



## Specification

<b>Applications</b>	Residential communities, office buildings, villas
<b>Display</b>	2.8-inch IPS color screen, resolution 320 × 240 pixels
<b>Casing Material</b>	ABS + PC
<b>Button</b>	5 programmable physical buttons
<b>Speaker</b>	5 W multimedia speaker
<b>Battery Capacity</b>	2600 mAh (typical capacity); 2470 mAh (rated capacity)
<b>Wi-Fi</b>	2.4 GHz / 5 GHz, Wi-Fi 6
<b>Power Supply</b>	5 VDC, 2 A
<b>Operating Temperature</b>	-20 °C to +60 °C (-4 °F to +140 °F)
<b>Storage Temperature</b>	-30 °C to +70 °C (-22 °F to +158 °F)
<b>Operating Humidity</b>	10% to 90% RH
<b>Product Dimension</b>	129.5 mm × 59.6 mm × 67.5 mm (5.10" × 2.35" × 2.66") (L × W × H);
<b>Installation</b>	Desktop Installation
<b>Gross Weight (G.W)</b>	395.3 g
<b>Package Dimensions</b>	Gift Box: 147.0 mm × 145.0 mm × 63.0 mm (5.79" × 5.71" × 2.48") (L × W × H); Outer CTN: 340.0 mm × 310.0 mm × 318.0 mm (13.39" × 12.20" × 12.52") (L × W × H);
<b>QTY/CTN</b>	20 pcs

## Functions

<b>Supported Protocols</b>	SIP 2.0 over UDP/TCP/TLS
<b>Audio</b>	Narrowband codec: G.711a, G.711u, G.729AB, iLBC; Wideband codec: G.722, Opus; Full-duplex hands-free communication with Acoustic Echo Cancellation (AEC)
<b>Video</b>	H.264
<b>DTMF</b>	In-band, out-of-band (RFC2833, SIP INFO)
<b>Do Not Disturb (DND)</b>	Supported
<b>Additional Functions</b>	Remote door unlocking, one-touch family call